




1. Turn off the general switch




4. Drill holes and insert the screws into the base.

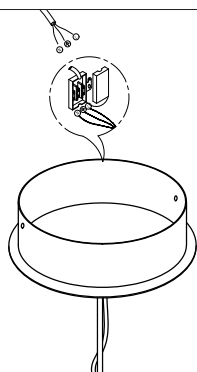


5. Connect wires.




7. Turn on the general switch.

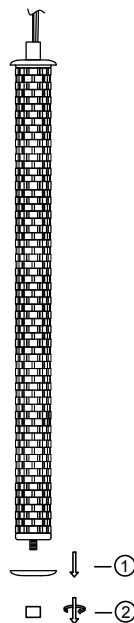


2. Unscrew the bottom part from the metal.

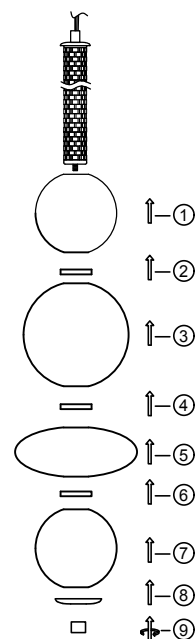

3. Insert the glasses and screw it.



6. Tie up side screws.

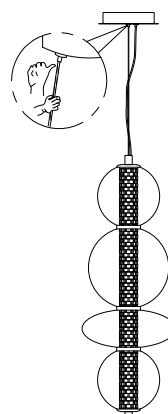

1. This light fitting operates at a normal supply voltage of 220-240V.
2. If the external flexdble cable of the lamp is damaged, it shall be exclusively replaced by the manufacturer of his service agent or a similar qualiad person in order to avoid hazard.