

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT
(IECEE) CB SCHEME

CB TEST CERTIFICATE

Product	Rechargeable Li-ion Polymer Battery
Name and address of the applicant	Dongguan NVT Technology Co., Ltd. No. 8, Xingguo Middle Road, Jiaoshe Village, Dongkeng Town, Dongguan City, Guangdong Province China
Name and address of the manufacturer	Dongguan NVT Technology Co., Ltd. No. 8, Xingguo Middle Road, Jiaoshe Village, Dongkeng Town, Dongguan City, Guangdong Province China
Name and address of the factory	<input type="checkbox"/> Additional information on page 2 Dongguan NVT Technology Co., Ltd. No. 8, Xingguo Middle Road, Jiaoshe Village, Dongkeng Town, Dongguan City, Guangdong Province China
Note: When more than one factory, please report on page 2	
Ratings and principal characteristics	7,74 Vdc, Rated Capacity: 2440 mAh / 18,88 Wh, Typical Capacity: 2500 mAh / 19,35 Wh
Trademark (if any)	
Customer's Testing Facility (CTF) Stage used	
Model / Type Ref.	BLP887
Additional information (if necessary may also be reported on page 2)	<input type="checkbox"/> Additional information on page 2 This CB Test Certificate is an addition to CB NL-75434 with Test Report Number 4377756.50 dated 2021-08-09 due to upgraded standard, updated cell CB Test Report and CB Test Certificate, updated maximum charging current and updated marking plate.
A sample of the product was tested and found to be in conformity with	IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 National differences: KR
As shown in the Test Report Ref. No. which forms part of this Certificate	4382927.50

This CB Test Certificate is issued by the National Certification Body

DEKRA Certification B.V.
Meander 1051, NL-6825 MJ Arnhem, Netherlands



Test Report issued under the responsibility of:



**TEST REPORT
IEC 62133-2**

Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems

Report Number..... : 4382927.50

Date of issue..... : 2021-11-29

Total number of pages : 31 pages

Name of Testing Laboratory preparing the Report : DEKRA Testing and Certification (Shanghai) Ltd., Guangzhou Branch

Applicant's name : Dongguan NVT Technology Co., Ltd.

Address..... : No. 8, Xingguo Middle Road, Jiaoshe Village, Dongkeng Town, Dongguan City, Guangdong Province, P.R. China

Test specification:

Standard : IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021

Test procedure : CB Scheme

Non-standard test method : N/A

TRF template used..... : IECEE OD-2020-F1:2021, Ed.1.4

Test Report Form No. : IEC62133_2B

Test Report Form(s) Originator : DEKRA Certification B.V.

Master TRF : Dated 2021-08-31

Copyright © 2021 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.



If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

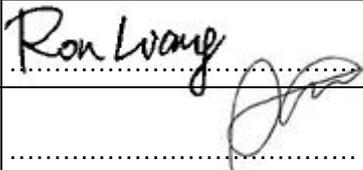Test item description	Rechargeable Li-ion Polymer Battery	
Trade Mark(s)		
Manufacturer	Dongguan NVT Technology Co., Ltd. No. 8, Xingguo Middle Road, Jiaoshe Village, Dongkeng Town, Dongguan City, Guangdong Province, P.R. China	
Model/Type reference	BLP887	
Ratings	7,74 Vdc, Rated Capacity: 2440 mAh / 18,88 Wh, Typical Capacity: 2500 mAh / 19,35 Wh	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	DEKRA Testing and Certification (Shanghai) Ltd., Guangzhou Branch
Testing location/ address		Block 5, No.3, Qiyun Road, Huangpu District, Guangzhou, Guangdong, China
Tested by (name, function, signature)		Ron Liang (Project Engineer) 
Approved by (name, function, signature) ...		Alger Yang (Reviewer) 
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	
Testing location/ address		
Tested by (name, function, signature)		
Approved by (name, function, signature) ...		
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	
Testing location/ address		
Tested by (name + signature)		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature) ...		
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	
Testing location/ address		
Tested by (name, function, signature)		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature) ...		
Supervised by (name, function, signature) :		

<p>List of Attachments (including a total number of pages in each attachment):</p> <p>Attachment 1: National differences of Korea (KR) (3 pages)</p> <p>Attachment 2: Photos and illustrations (3 pages)</p>	
<p>Summary of testing:</p>	
<p>Tests performed (name of test and test clause):</p> <p>Battery model BLP887 was subjected to full tests as far as applicable. (4377756.50)</p> <p>No additional test was conducted. (4382927.50)</p>	<p>Testing location:</p> <p>DEKRA Testing and Certification (Shanghai) Ltd., Guangzhou Branch Block 5, No.3, Qiyun Road, Huangpu District, Guangzhou, Guangdong, China</p>
<p>Summary of compliance with National Differences (List of countries addressed):</p> <p>National differences of Korea (KR) have been considered.</p> <p>Countries outside the CB scheme membership may also accept this report.</p> <p>The product may be request to be provided and evaluated when submitted for national approval.</p>	
<p>Use of uncertainty of measurement for decisions on conformity (decision rule) :</p> <p><input checked="" type="checkbox"/> No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").</p> <p><input type="checkbox"/> Other:... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)</p> <p>Information on uncertainty of measurement:</p> <p>The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.</p> <p>IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.</p> <p>Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.</p>	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

realme

聚合物锂离子电池组/二次鋰電池組/
Rechargeable Li-ion Polymer Battery

型号/型號/Model:BLP887 2ICP6/33/90

充电限制电压/充電限制電壓/
Limited Charge Voltage:8.9Vdc

额定容量/額定電容量/Rated Capacity:2440mAh/18.88Wh

标称电压/標稱電壓/Nominal Voltage:7.74Vdc

电池典型容量/Typical Capacity:2500mAh/19.35Wh

执行标准:GB 31241-2014



IS 16046(Part 2)/
IEC 62133-2



R-41145041
www.bis.gov.in

**警告/Warning**

仅可使用 realme 认可的充电器。禁止拆解、刺破、撞击、挤压或投入火中。若出现鼓胀或浸水后禁止使用。请勿置于高温环境中。僅可使用 realme 認可的充電器。禁止拆解、刺破、擠壓、加熱或燃燒。若出現鼓脹或浸水後禁止使用。請勿置于高溫環境中。

Use specified realme charger only. Do not disassemble, puncture, crush, heat, or burn.

TIS 2217-2548

IMPORTED BY

FESSOPY

CO.,LTD.



RealMe 重庆移动通信有限公司 RealMe 重慶移動通信有限公司

MADE FOR Realme Chongqing Mobile Telecommunications Corp., Ltd.

中国制造

中國製造

MADE IN CHINA



Pb

2020/06/15
NA-P887-02
5141000001

**Remark:**

- Cells used in the manufacture of a battery need not be marked.
- The external connector of battery pack is designed for the specific end products, and prevents reverse polarity, so polarity need not be marked.

Test item particulars	Rechargeable Li-ion Polymer Battery
Classification of installation and use	Portable use
Supply Connection	N/A
Recommend charging method declared by the manufacturer	CC/CV
Discharge current (0,2 It A)	670 mA
Specified final voltage	6,0 Vdc
Upper limit charging voltage per cell	-12-12 °C: 4,45 V 12-45 °C: 4,50 V 45-55 °C: 4,15 V
Maximum charging current	-12- -2 °C: 0,3C Max to 8,9 V, then CV to 0,05C -2-5 °C: 1,0C Max to 8,4 V, 0,8C Max to 8,9 V, then CV to 0,02C 5-12 °C: 1,2C Max to 8,4 V, 1,0C Max to 8,9 V, then CV to 0,02C 12-45 °C: 7,5 A Max to 8,9 V, 2,0C Max to 9,0 V, then CV to 0,25C 45-55 °C: 0,6C Max to 8,3 V
Charging temperature upper limit	55 °C
Charging temperature lower limit	-12 °C
Polymer cell electrolyte type	<input checked="" type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input type="checkbox"/> NA
Possible test case verdicts:	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement.....	P (Pass)
- test object does not meet the requirement.....	F (Fail)
Testing	
Date of receipt of test item	N/A
Date (s) of performance of tests	N/A
General remarks:	
<p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. This report is not intended to use for CMA application. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to calculate the uncertainty associated with the measurement result.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> <p>The sample has been tested and found compliant with the requirement of the safety standards listed below: IEC 62133-2:2017 IEC 62133-2:2017/AMD1:2021 EN 62133-2:2017 EN 62133-2:2017/AMD1:2021</p>	

Manufacturer's Declaration per sub-clause 4.2.5 of IEC60080-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : Dongguan NVT Technology Co., Ltd. No. 8, Xingguo Middle Road, Jiaoshe Village, Dongkeng Town, Dongguan City, Guangdong Province, P.R. China	
General product information and other remarks:	
Rechargeable Li-ion Polymer Battery, including two cells (cell model 513290) connected in series and protection circuit. The cell model 513290 was tested according to IEC 62133-2:2017 and IEC 62133-2:2017/AMD1:2021 in DEKRA CB report No. 4382179.50 issued on 2021-11-16 and CB certificate NL-77437 issued on 2021-11-16, issued by DEKRA Certification B.V.. The rating typical capacity: 2500 mAh / 19,35 Wh is not used for the tests of the standard, but for the control in manufacture process. The test result in this report considered the worst case if nothing mentioned.	
Amendment report 4382927.50: The report 4382927.50 was based on the CB report 4377756.50, issued by DEKRA Testing and Certification (Shanghai) Ltd. Guangzhou Branch, issued on 2021-08-09, and CB certificate No.: NL-75434 issued by DEKRA Certification B.V., issued on 2021-08-09. It was issued due to below modifications: <ol style="list-style-type: none"> 1. Upgraded standard to IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021. 2. Updated cell CB Test Report and CB Test Certificate. 3. Updated maximum charging current. 4. Updated marking plate. After technical review and based on cell updated CB report, no tests were considered; see the "summary of testing".	

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
4	PARAMETER MEASUREMENT TOLERANCES		P
	Parameter measurement tolerances		P
5	GENERAL SAFETY CONSIDERATIONS		P
5.1	General		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ		N/A
	Insulation resistance (MΩ) :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearances and creepage distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition		P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		P
5.4	Temperature, voltage and current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented		P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer		P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified		P
5.5	Terminal contacts		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current		P
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short circuits		P
5.6	Assembly of cells into batteries		P
5.6.1	General		P
	Each battery has an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region		P
	This protection may be provided external to the battery such as within the charger or the end devices		N/A
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N/A
	If there is more than one battery housed in a single battery case, each battery has protective circuitry that can maintain the cells within their operating regions		N/A
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A
	Protective circuit components are added as appropriate and consideration given to the end-device application		P
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance		P
5.6.2	Design recommendation		P
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks		P
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		P
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage are not counted as an overcharge protection		P
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		P
	It is recommended that the cells and cell blocks are not discharged beyond the cell manufacturer's specified final voltage		P
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry are incorporated into the battery management system		P
5.6.3	Mechanical protection for cells and components of batteries		P
	Mechanical protection for cells, cell connections and control circuits within the battery are provided to prevent damage as a result of intended use and reasonably foreseeable misuse		P
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product		P
	The battery case and compartments housing cells are designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer		P
	For batteries intended for building into a portable end product, testing with the battery installed within the end product is considered when conducting mechanical tests		N/A
5.7	Quality plan		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery		P
5.8	Battery safety components		P
6	TYPE TEST AND SAMPLE SIZE		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		P
	The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3 Ω are tested in accordance with Table 1		N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of 20 °C \pm 5 °C		P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection		P
	When conducting the short-circuit test, consideration is given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test		P
7	SPECIFIC REQUIREMENTS AND TESTS		P
7.1	Charging procedure for test purposes		P
7.1.1	First procedure		P
	This charging procedure applies to subclauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 °C \pm 5 °C, using the method declared by the manufacturer		P
	Prior to charging, the battery has been discharged at 20 °C \pm 5 °C at a constant current of 0,2 It A down to a specified final voltage		P
7.1.2	Second procedure		P
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	After stabilization for 1 h to 4 h, at an ambient temperature of the highest test temperature and the lowest test temperature, respectively, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant current to constant voltage charging method		P
7.2	Intended use		P
7.2.1	Continuous charging at constant voltage (cells)		P
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer		P
	Results: no fire, no explosion, no leakage..... :	Refer to CB test report 4382179.50	P
7.2.2	Case stress at high ambient temperature (battery)		P
	Oven temperature (°C)	70 °C	—
	Results: no physical distortion of the battery case resulting in exposure of internal protective components and cells		P
7.3	Reasonably foreseeable misuse		P
7.3.1	External short-circuit (cell)		P
	The cells were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		P
	Results: no fire, no explosion..... :	Refer to CB test report 4382179.50	P
7.3.2	External short-circuit (battery)		P
	The batteries were tested until one of the following occurred:		P
	- 24 hours elapsed; or		P
	- The case temperature declined by 20 % of the maximum temperature rise		N/A
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N/A
	A single fault in the discharge protection circuit is conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	A single fault applies to protective component parts such as MOSFET (metal oxide semiconductor field-effect transistor), fuse, thermostat or positive temperature coefficient (PTC) thermistor		P
	Results: no fire, no explosion..... :	(See appended table 7.3.2)	P
7.3.3	Free fall		P
	Results: no fire, no explosion		P
7.3.4	Thermal abuse (cells)		P
	Oven temperature (°C)..... :	Refer to CB test report 4382179.50	—
	Results: no fire, no explosion	Refer to CB test report 4382179.50	P
7.3.5	Crush (cells)		P
	The crushing force was released upon:		P
	- The maximum force of 13 kN ± 0,78 kN has been applied; or		P
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: no fire, no explosion..... :	Refer to CB test report 4382179.50	P
7.3.6	Over-charging of battery		P
	The supply voltage which is:		P
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or		N/A
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and		P
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached		P
	Test was continued until the temperature of the outer casing:		P
	- Reached steady state conditions (less than 10 °C change in 30-minute period); or		N/A
	- Returned to ambient		P
	Results: no fire, no explosion..... :	(See appended table 7.3.6)	P
7.3.7	Forced discharge (cells)		P
	Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage		P
	- The discharge voltage reaches the negative value of upper limit charging voltage within the testing duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	- The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration		P
	Results: no fire, no explosion..... :	Refer to CB test report 4382179.50	P
7.3.8	Mechanical tests (batteries)		P
7.3.8.1	Vibration		P
	Results: no fire, no explosion, no rupture, no leakage or venting. :	(See appended table 7.3.8.1)	P
7.3.8.2	Mechanical shock		P
	Results: no leakage, no venting, no rupture, no explosion and no fire :	(See appended table 7.3.8.2)	P
7.3.9	Design evaluation – Forced internal short-circuit (cells)		P
	The cells complied with national requirement for :	Polymer cell, this test was performed as requested by cell applicant.	—
	The pressing was stopped upon:		P
	- A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	400 N	P
	Results: no fire..... :	Refer to CB test report 4382179.50	P
8	INFORMATION FOR SAFETY		P
8.1	General		P
	Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products		P
	Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product	Not direct sale for end user	N/A
	As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user	Not direct sale for end user	N/A
8.2	Small cell and battery safety information		N/A
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		N/A
	- Keep small cells and batteries which are considered swallowable out of the reach of children		N/A
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		N/A
	- In case of ingestion of a cell or battery, seek medical assistance promptly		N/A
9	MARKING		P
9.1	Cell marking		P
	Cells are marked as specified in IEC 61960, except coin cells	Cells used in the manufacture of a battery need not be marked.	N/A
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		P
9.2	Battery marking		P
	Batteries are marked as specified in IEC 61960, except for coin batteries		P
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity		N/A
	Batteries are marked with an appropriate caution statement		P
	- Terminals have clear polarity marking on the external surface of the battery, or		N/A
	- Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
9.3	Caution for ingestion of small cells and batteries		N/A
	Coin cells and batteries identified as small batteries include a caution statement regarding the hazards of ingestion in accordance with 8.2		N/A
	Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package		N/A
9.4	Other information		P
	The following information are marked on or supplied with the battery:		P
	- Storage and disposal instructions		P
	- Recommended charging instructions		P
10	PACKAGING AND TRANSPORT		P
	Packaging for coin cells are not be small enough to fit within the limits of the ingestion gauge of Figure 3		N/A
ANNEX A	CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE		P
A.1	General		P
A.2	Safety of lithium ion secondary battery		P
A.3	Consideration on charging voltage		P
A.3.1	General		P
A.3.2	Upper limit charging voltage		P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		P
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied		P
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range		P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied		P
A.4.3	High temperature range		P
A.4.3.1	General		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.4.3.2	Explanation of safety viewpoint		P
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		P
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range		P
A.4.4	Low temperature range		P
A.4.4.1	General		P
A.4.4.2	Explanation of safety viewpoint		P
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		P
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		P
A.4.5	Scope of the application of charging current		P
A.4.6	Consideration of discharge		P
A.4.6.1	General		P
A.4.6.2	Final discharge voltage and explanation of safety viewpoint		P
A.4.6.3	Discharge current and temperature range		P
A.4.6.4	Scope of application of the discharging current		P
A.5	Sample preparation		P
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P
A.5.5	Insertion of nickel particle in cylindrical cell		N/A
A.5.5.1	Insertion of nickel particle in winding core		N/A
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		N/A
A.5.6	Insertion of nickel particle in prismatic cell		P
A.6	Experimental procedure of the forced internal short-circuit test		P
A.6.1	Material and tools for preparation of nickel particle		P
A.6.2	Example of a nickel particle preparation procedure		P
A.6.3	Positioning (or placement) of a nickel particle		P
A.6.4	Damaged separator precaution		P
A.6.5	Caution for rewinding separator and electrode		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.6.6	Insulation film for preventing short-circuit		P
A.6.7	Caution when disassembling a cell		P
A.6.8	Protective equipment for safety		P
A.6.9	Caution in the case of fire during disassembling		P
A.6.10	Caution for the disassembling process and pressing the electrode core		P
A.6.11	Recommended specifications for the pressing device		P
ANNEX B	RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS		P
ANNEX C	RECOMMENDATIONS TO THE END-USERS		N/A
ANNEX D	MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS		N/A
D.1	General		N/A
D.2	Method		N/A
	A sample size of three coin cells is required for this measurement		N/A
	Coin cells with an internal resistance greater than 3 Ω require no further testing	(See appended table D.2)	N/A
	Coin cells with an internal resistance less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1		N/A
ANNEX E	PACKAGING AND TRANSPORT		N/A
ANNEX F	COMPONENT STANDARDS REFERENCES		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

7.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Sample No.	Recommended charging voltage Vc (Vdc)	Recommended charging current I _{rec} (A)	OCV before test (Vdc)	Results	
Supplementary information:					
Remark: Cell was approved in test report 4382179.50.					

7.3.1	TABLE: External short circuit (cell)					P
Sample No.	Ambient (°C)	OCV at start of test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (K)	Results	
Samples charged at charging temperature upper limit						
Samples charged at charging temperature lower limit						
Supplementary information:						
Remark: Cell was approved in test report 4382179.50.						

7.3.2	TABLE: External short circuit (battery)						P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (K)	Component single fault condition	Results	
4377756/B01	23,3	8,874	91	0,4	--	P	
4377756/B02	23,3	8,878	89	1,3	Q2 pin S1-S2 / S	P	
4377756/B03	23,3	8,871	92	1,5	Q1 pin S1-S2 / S	P	
4377756/B04	23,3	8,872	91	1,3	F1 pin 1-3 / S	P	
4377756/B05	23,3	8,872	91	1,3	RS / S	P	
Supplementary information:							
- No fire or explosion							
- Remark1: S: Short-circuited; O: Open-circuited							
- Remark2: Tested with (U1) SN28Z719DRZR, (U2) R5438L328BA, (Q1) MTM78E2B0LBF, (Q2) FC7P23440L / KFC7P23440L, (F1) SFJ-0822U.							

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

7.3.2	TABLE: External short circuit (battery)					P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (K)	Component single fault condition	Results
4377756/B23	23,3	8,873	86	0,3	--	P
4377756/B24	23,3	8,876	92	1,2	Q2 pin S1-S2 / S	P
4377756/B25	23,3	8,873	87	1,3	Q1 pin S1-S2 / S	P
4377756/B26	23,3	8,866	91	1,4	F1 pin 1-3 / S	P
4377756/B27	23,3	8,859	90	1,2	RS / S	P
Supplementary information:						
- No fire or explosion						
- Remark1: S: Short-circuited; O: Open-circuited						
- Remark2: Tested with (U1) SN28Z719DRZR, (U2) S-8223CAM-I6T1U, (Q1) EMH2418R, (Q2) EFC4C002NL, (F1) D6SC2-15.						

7.3.2	TABLE: External short circuit (battery)					P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (K)	Component single fault condition	Results
4377756/B33	23,3	8,872	96	1,2	--	P
4377756/B34	23,3	8,870	92	1,7	Q2 pin S1-S2 / S	P
4377756/B35	23,3	8,872	91	1,9	Q1 pin S1-S2 / S	P
4377756/B36	23,3	8,876	89	2,0	F1 pin 1-3 / S	P
4377756/B37	23,3	8,871	91	1,7	RS / S	P
Supplementary information:						
- No fire or explosion						
- Remark1: S: Short-circuited; O: Open-circuited						
- Remark2: Tested with (U1) SH366003, (U2) R5438L328BA, (Q1) MTM78E2B0LBF, (Q2) AO CR32326, (F1) SFJ-0822U.						

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

7.3.5	TABLE: Crush (cells)				P
Sample No.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results	
Samples charged at charging temperature upper limit					
Samples charged at charging temperature lower limit					
Supplementary information:					
Remark: Cell was approved in test report 4382179.50.					

7.3.6	TABLE: Over-charging of battery				P
Constant charging current (A)	4,88 A			—	
Supply voltage (Vdc)	10,8 Vdc			—	
Sample No.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results	
4377756/B09	6,467	60	36,8	P	
4377756/B10	6,503	60	36,4	P	
4377756/B11	6,475	60	35,7	P	
4377756/B12	6,518	60	32,5	P	
4377756/B13	6,461	60	36,8	P	
Supplementary information:					
- No fire or explosion					
- Remark: Tested with (U1) SN28Z719DRZR, (U2) R5438L328BA, (Q1) MTM78E2B0LBF, (Q2) FC7P23440L / KFC7P23440L, (F1) SFJ-0822U.					

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

7.3.6	TABLE: Over-charging of battery			P
Constant charging current (A)		4,88 A		—
Supply voltage (Vdc)		10,8 Vdc		—
Sample No.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results
4377756/B28	6,506	60	35,3	P
4377756/B29	6,484	60	42,8	P
4377756/B30	6,488	60	40,6	P
4377756/B31	6,499	60	40,1	P
4377756/B32	6,515	60	41,4	P
Supplementary information:				
- No fire or explosion				
- Remark: Tested with (U1) SN28Z719DRZR, (U2) S-8223CAM-I6T1U, (Q1) EMH2418R, (Q2) EFC4C002NL, (F1) D6SC2-15.				

7.3.6	TABLE: Over-charging of battery			P
Constant charging current (A)		4,88 A		—
Supply voltage (Vdc)		10,8 Vdc		—
Sample No.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results
4377756/B38	6,476	60	42,7	P
4377756/B39	6,505	60	41,4	P
4377756/B40	6,470	60	40,6	P
4377756/B41	6,500	60	41,9	P
4377756/B42	6,494	60	42,8	P
Supplementary information:				
- No fire or explosion				
- Remark: Tested with (U1) SH366003, (U2) R5438L328BA, (Q1) MTM78E2B0LBF, (Q2) AOOCR32326, (F1) SFJ-0822U.				

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

7.3.7	TABLE: Forced discharge (cells)				P
Sample No.	OCV before application of reverse charge (Vdc)	Measured reverse charge I_r (A)	Lower limit discharge voltage (Vdc)	Results	
Supplementary information:					
Remark: Cell was approved in test report 4382179.50.					

7.3.8.1	TABLE: Vibration					P
Sample No.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
4377756/B14	8,867	8,866	69,392	69,391	P	
4377756/B15	8,870	8,869	69,341	69,340	P	
4377756/B16	8,868	8,865	69,247	69,245	P	
Supplementary information:						
- No fire or explosion						
- No rupture						
- No leakage						
- No venting						

7.3.8.2	TABLE: Mechanical shock					P
Sample No.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
4377756/B17	8,872	8,871	69,275	69,273	P	
4377756/B18	8,866	8,865	69,462	69,461	P	
4377756/B19	8,875	8,874	69,361	69,360	P	
Supplementary information:						
- No fire or explosion						
- No rupture						
- No leakage						
- No venting						

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict

7.3.9	TABLE: Forced internal short circuit (cells)					P
Sample No.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location ¹⁾	Maximum applied pressure (N)	Results	
Samples charged at charging temperature upper limit						
Samples charged at charging temperature lower limit						
Supplementary information:						
¹⁾ Identify one of the following: 1: Nickel particle inserted between positive and negative (active material) coated area. 2: Nickel particle inserted between positive aluminium foil and negative active material coated area. Remark: Cell was approved in test report 4382179.50.						

D.2	TABLE: Internal AC resistance for coin cells				N/A
Sample no.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results ¹⁾	
Supplementary information:					
¹⁾ Coin cells with an internal resistance less than or equal to 3 Ω, see test result on corresponding tables according to Clause 6 and Table 1.					

IEC 62133-2					
Clause	Requirement + Test		Result - Remark		Verdict
TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
Cell	Ningde AmpereX Technology Limited	513290	3,87 Vdc, 2465 mAh	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	CB Cert. no.: NL-77437 CB report no.: 4382179.50
PCB	RED BOARD LTD	H103C	V-0, 130 °C	UL 796	UL E133472
Alternative_ PCB	TRIPOD (WUXI) ELECTRONIC CO LTD.	2-9	V-0, 130 °C	UL 796	UL E222034
Alternative_ PCB	Interchangeable	Interchangeable	V-0, 130 °C	UL 796	UL approval
FPC	RED BOARD LTD	E102A	V-0, 110 °C	UL 796F	UL E311772
Alternative_ FPC	GANZHOU SUN&LYNN CIRCUITS CO LTD.	SL-FM	V-0, 105 °C	UL 796F	UL E364241
Alternative_ FPC	Interchangeable	Interchangeable	V-0 or VTM-0, min 105 °C	UL 796F	UL approval
IC-protect (U1)	TEXAS INSTRUMENTS	SN28Z719DR ZR	V _{CC} = -0,3 V ~ 30 V	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance
Alternative_ IC-protect (U1)	SINO WEALTH	SH366003	V _{CC} = -0,3 V ~ 30 V	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance
IC-protect (U2)	RICOH	R5438L328BA	V _{DD} = V _{C1} -0,3 V to V _{C1} +6,5 V V _{C1} -0,3 V to 26 V	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance
Alternative_ IC-protect (U2)	ABLIC Inc.	S-8223CAM-16T1U	V _{SS} -0,3 V to V _{SS} +28 V	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance

IEC 62133-2					
Clause	Requirement + Test			Result - Remark	Verdict
MOSFET(Q1)	Panasonic Corporation	MTM78E2B0L BF	$V_{DS} = 20 \text{ V}$	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance
Alternative_MOSFET(Q1)	ON Semiconductor	EMH2418R	$V_{DSS} = 24 \text{ V}$	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance
MOSFET (Q2)	Panasonic Corporation	FC7P23440L ²⁾	$V_{SS} = 30 \text{ V}$	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance
Alternative_MOSFET (Q2)	Nuvoton Technology Corporation	KFC7P23440L ²⁾	$V_{SS} = 30 \text{ V}$	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance
Alternative_MOSFET (Q2)	ON Semiconductor	EFC4C002NL	$V_{SSS} = 30 \text{ V}$	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance
Alternative_MOSFET (Q2)	ALPHA&OMEGA SEMICONDUCTOR	AOCR32326	$V_{SS} = 30 \text{ V}$	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance
FUSE(F1)	DEXERIALS CORP	SFJ-0822U	36 V, 15 A	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance
Alternative_FUSE(F1)	SCHOTT Japan Corporation	D6SC2-15	36 V, 15 A	IEC/EN 62133-2:2017, IEC/EN 62133-2:2017/AMD1: 2021	Tested in appliance
Supplementary information:					
<p>¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.</p> <p>²⁾ MOSFET (Q2) model FC7P23440L and KFC7P23440L are under brand change from Panasonic to Nuvoton. MOSFET KFC7P23440L under Nuvoton brand have equivalent same performance carry same quality assurance with Panasonic MOSFET FC7P23440L. There is no impact in product specification (function), quality and reliability.</p>					

Attachment 1: National differences of Korea (KR)

IEC62133_2A ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT			
IEC 62133-2			
(REPUBLIC OF KOREA) NATIONAL DIFFERENCES			
(SECONDARY CELLS AND BATTERIES CONTAINING ALKALINE OR OTHER NON-ACID ELECTROLYTES - SAFETY REQUIREMENTS FOR PORTABLE SEALED SECONDARY LITHIUM CELLS, AND FOR BATTERIES MADE FROM THEM, FOR USE IN PORTABLE APPLICATIONS - PART 2: LITHIUM SYSTEMS)			
Differences according to: National standard KC62133-2(2020-07)			
TRF template used :.....: IECEE OD-2020-F3, Ed. 1.1			
Attachment Form No: KR_ND_IEC62133_2A			
Attachment Originator: KTR			
Master Attachment: Dated 2020-09-25			
Copyright © 2020 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	National Differences		
7.3.6	Over-charging of battery		N/A
<i>(Revision)</i>	[Add the bolded text] b) Test The test shall be carried out in an ambient temperature of 20 °C ± 5 °C. Each test battery shall be discharged at a constant current of 0,2 It A, to a final discharge voltage specified by the manufacturer. Sample batteries shall then be charged at a constant current of 2,0 It A, using a supply voltage which is: <ul style="list-style-type: none"> • 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or • 1,2 times the upper limit charging voltage presented in Table A.1 per cell for series connected multi-cell batteries, and • sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached. <u>• In case the charging voltage specified by the manufacturer is higher than the overcharge test voltage, the maximum charging voltage specified by manufacturer should be applied with 2.0 ItA, (e.g., quick charging power bank, etc.)</u>	N/A	


Attachment 1: National differences of Korea (KR)

IEC62133_2A ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>[Replace to the following statement]</p> <p>c) Acceptance criteria</p> <p>Overcharging exceeding to the limits specified by the manufacturer should not result in fire or explosion.</p>		N/A
Annex G	Definition for shape and materials of outer case for cell		—
(Addition)	<p>G.1 General</p> <p>Annex G provides definitions for shape and materials of outer case for cell</p> <p>G.2 Shape of outer case for cell</p> <p>G 2.1 Cylindrical cell</p> <p>Cell with a cylindrical shape in which the overall height is equal to or greater than diameter.</p> <p>G 2.2 Prismatic cell</p> <p>Cell having the shape of a parallelepiped whose faces are rectangular</p> <p>G.3 Materials of outer case for cell</p> <p>G.3.1 Soft case</p> <p>Non-metallic outer case or container for cell</p> <p>G.3.2 Hard case</p> <p>Metallic outer case or container for cell.</p>	<p>(Shape of outer cases)</p> <p><input type="checkbox"/> Cylindrical</p> <p><input checked="" type="checkbox"/> Prismatic</p> <p>(Materials of outer cases)</p> <p><input type="checkbox"/> Hard</p> <p><input checked="" type="checkbox"/> Soft</p>	—
Annex H	Calculation method of the volumetric energy density for cell		—
(Addition)	<p>Annex H provide a calculation method of the volumetric energy density for cell in use of smart phone, tablet, notebook.</p> <p>H.1 General</p> <p>Unless otherwise stated in the Annex E, the dimensions for calculation are based on these for cell before shipment and the volumetric energy density shall be calculated with a maximum values specified by manufacturer. If the specification for cell can't be provided a dimension for calculation, the manufacturer's other documentation shall be provided to demonstrate compliance for its calculation.</p>	648,6 Wh / L	—

Attachment 1: National differences of Korea (KR)

IEC62133_2A ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>H.2 Calculation Method</p> <p>L : Length (max.) of cell (including terrace) W : Width (max.) of cell T : Thickness (max.) when shipping charge (For reference, Please Exclude the dimension of any tape that is attached to cell)</p> $\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{\text{Length (L)} \times \text{Width (W)} \times \text{Thickness (T)}}$ <p>[H.1 – Prismatic cell using soft case]</p> <p>L : Length (max.) of cell W : Width (max.) of cell T : Thickness when shipping charge (For reference, Please Exclude the dimension of any tape that is attached to cell)</p> $\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{\text{Length (L)} \times \text{Width (W)} \times \text{Thickness (T)}}$ <p>[H.2 – Prismatic cell using hard case]</p> <p>D : Diameter (max.) of cell L : Length (max.) of cell (According to shape of cell at shipping, The dimension of tube for cell may be included in overall dimension of cell)</p> $\text{Volumetric energy density (Wh/L)} = \frac{\text{Nominal voltage (V)} \times \text{Rated capacity (Ah)}}{3.14159 \times \frac{\text{Diameter (D)}^2}{4} \times \text{Length(L)}}$ <p>[H.3 – Cylindrical cell using hard case]</p>		—

Attachment 2: Photos and illustrations

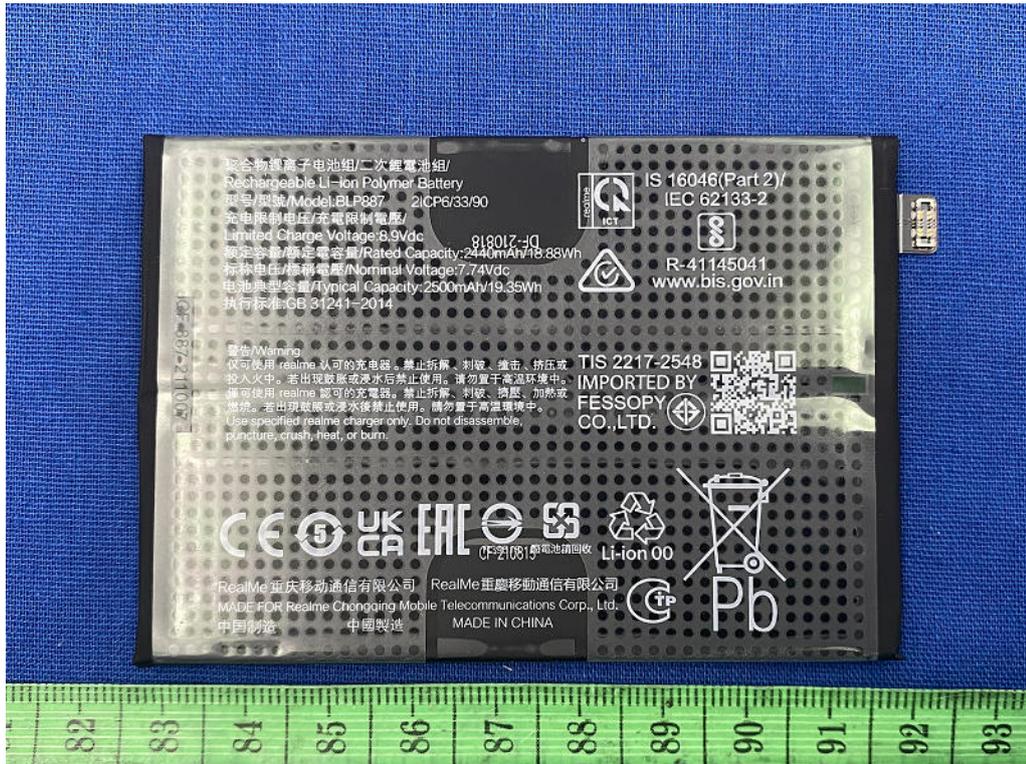

Overview (refer to page 4 for battery marking)




Overview

Attachment 2: Photos and illustrations




Internal view

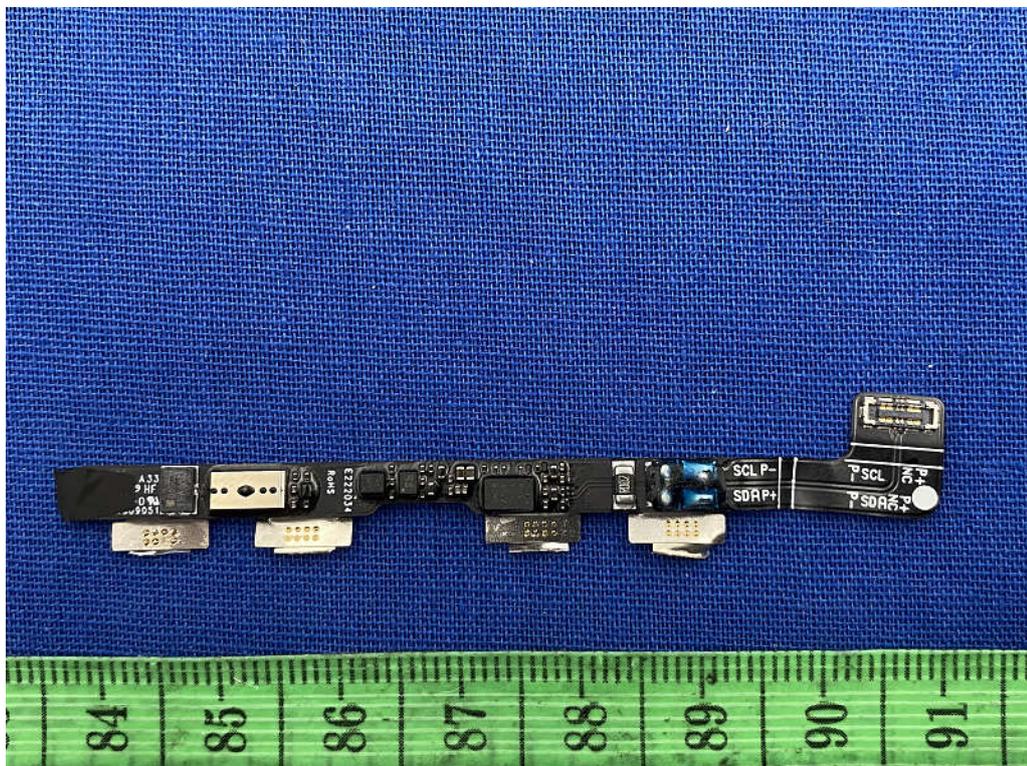


Internal view

Attachment 2: Photos and illustrations

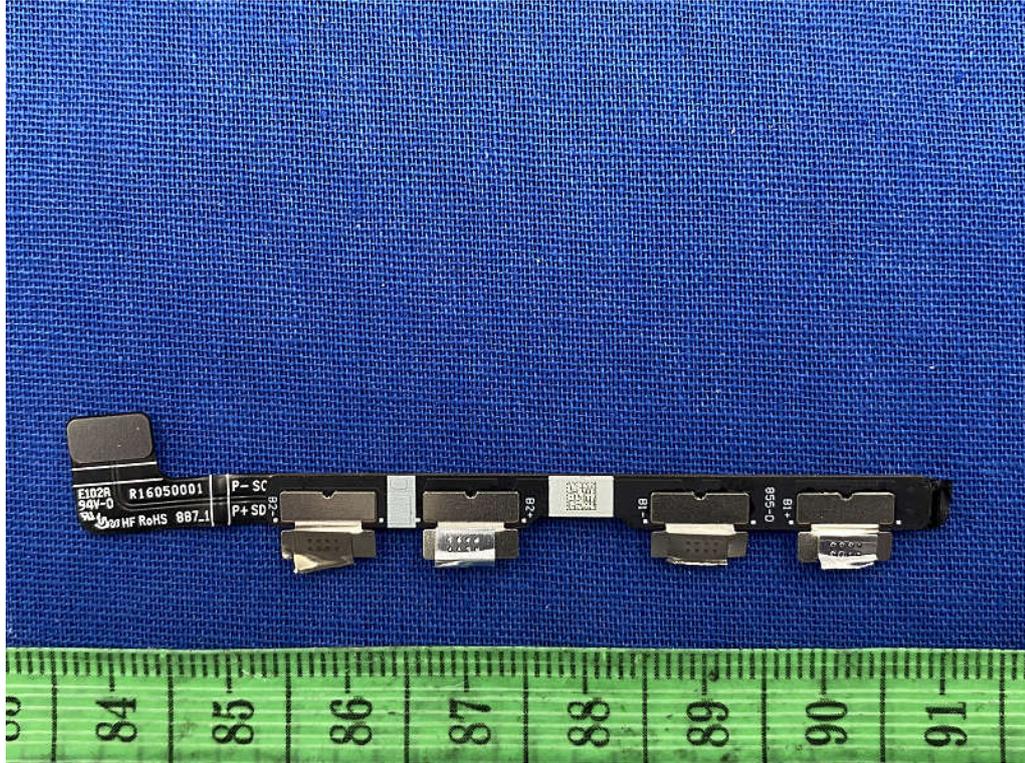

Internal view

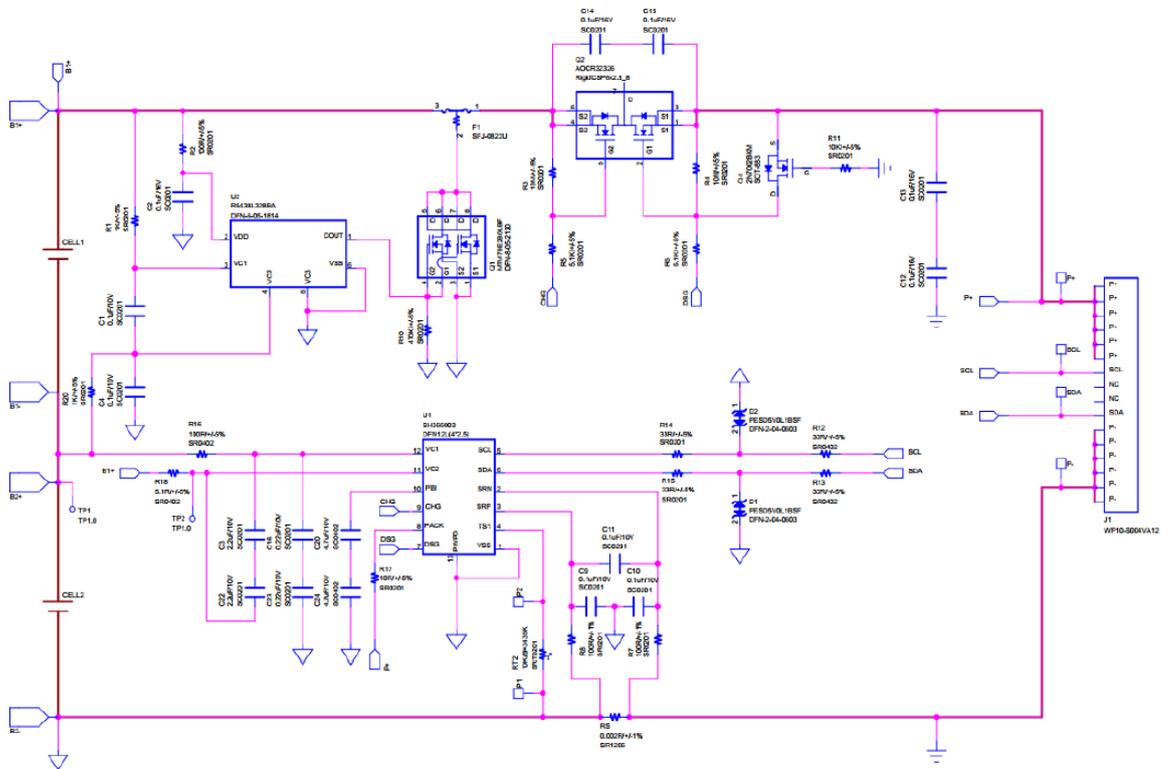

Protective circuit

-END-