
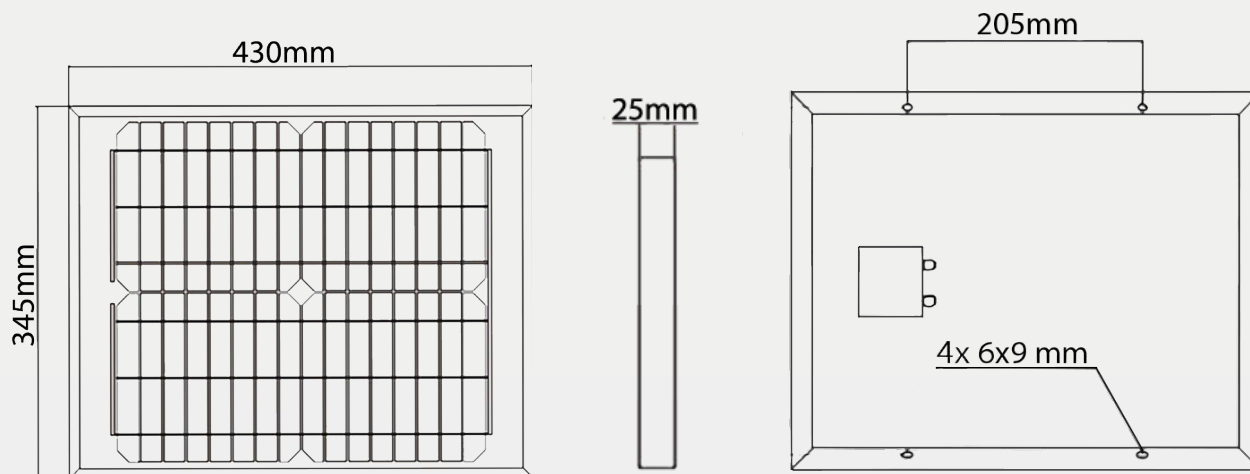



Eigenschaften

- hohe Betriebsspannung von 36V, perfekt für 24V Systeme
- bei Einsatz eines MPPT Ladereglers auch hervorragend in 12V Solarsysteme integrierbar gefertigt nach aktuellsten Normen
- monokristalline A-Grade Solarzellen
- Zellaufbau mit 4-Busbar-Technologie
- extrem widerstandsfähiges ESG-Glas
- ideal für 12V-24V Systeme an Land oder in mobilen Solar-Systemen

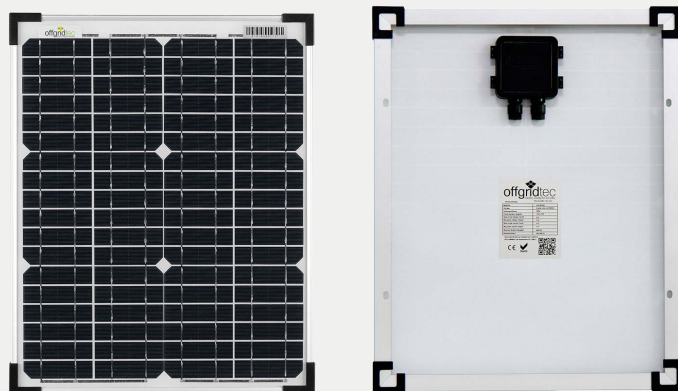



Offgridtec 20W Mono Solarpanel

Artikelnummer	3-01-010955
EAN	4250983255751
Hersteller-Teilenummer	010955
Systemspannung	24V / DC
Generatorleistung (Wp)	20 Wp
Modulspannung (Vmp)	36 V
max. Strom (Imp)	0,55 A
Leerlaufspannung (Voc)	42,4 V
Kurzschlussstrom (Isc)	0,58 A
max. System-Spannung	600V / DC
Zelltyp	Monokristallin
Umgebungstemperatur	-40°C - +85°C
Toleranz	±3%
Abmessungen (LxBxH)	430 x 345 x 25 mm
Gewicht	1,69 kg
Zell-Wirkungsgrad	>22,3%

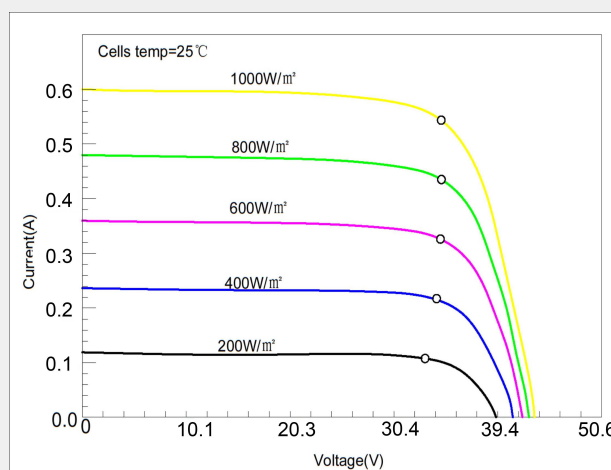

Characteristics

- high operating voltage of 36V,
- perfect for 24V systems
- can also be excellently integrated into 12V solar systems when using an MPPT charge controller manufactured according to the latest standards
- Monocrystalline A-grade solar cells
- Cell construction with 4-busbar technology
- Extremely resistant ESG glass
- ideal for 12V-24V systems on land or in mobile solar systems

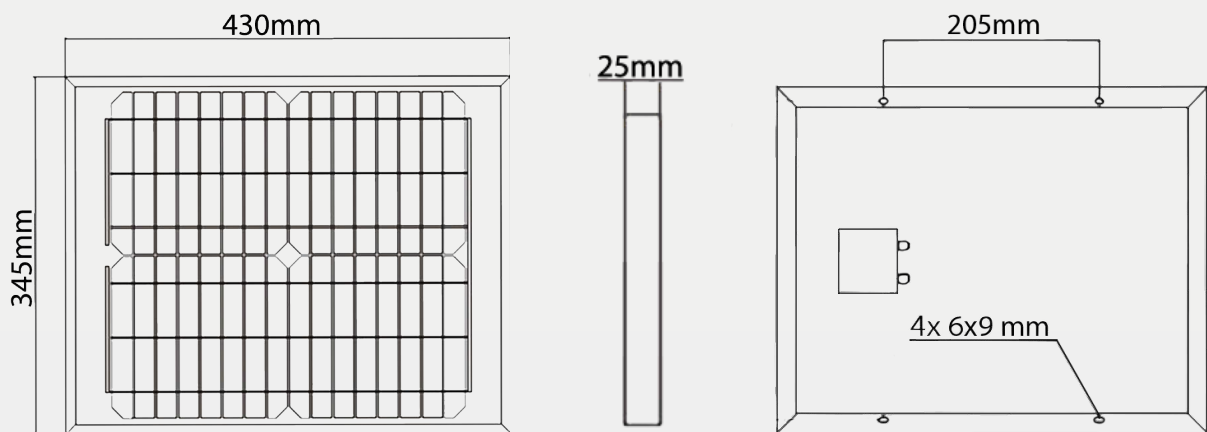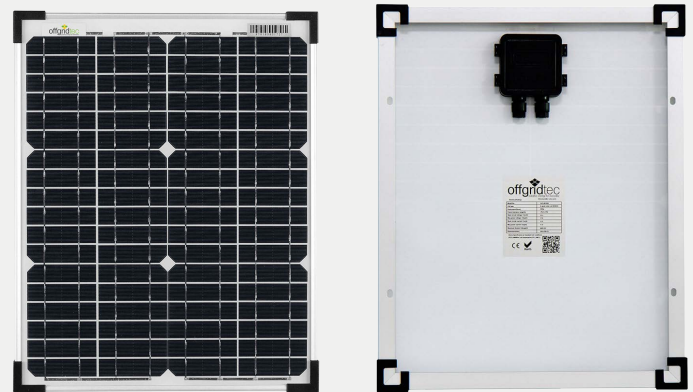

Offgridtec 20W Mono Solar panel

Article number	3-01-010955
EAN	4250983255751
Manufacturer part number	010955
System voltage	24V / DC
Generator output (Wp)	20 Wp
Module voltage (Vmp)	36 V
max. current (Imp)	0,55 A
Open circuit voltage (Voc)	42,4 V
Short circuit current (Isc)	0,58 A
Max. system voltage	600V / DC
Cell type	Monokristallin
Ambient temperature	-40°C - +85°C
Tolerance	±3%
Dimensions (LxWxB)	430 x 345 x 25 mm
Weight	1,69 kg
Cell efficiency	>22,3%

