



# NOVA LUCE


9186954




1. Turn off the general switch

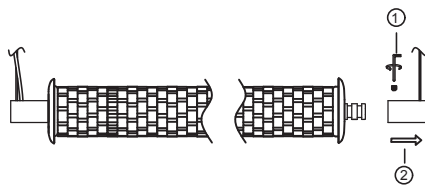


2. Unscrew the side part from the metal.

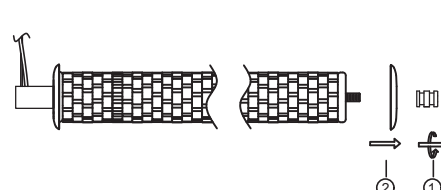


3. Unscrew the other side of the metal.




9. Screw the hanging element.

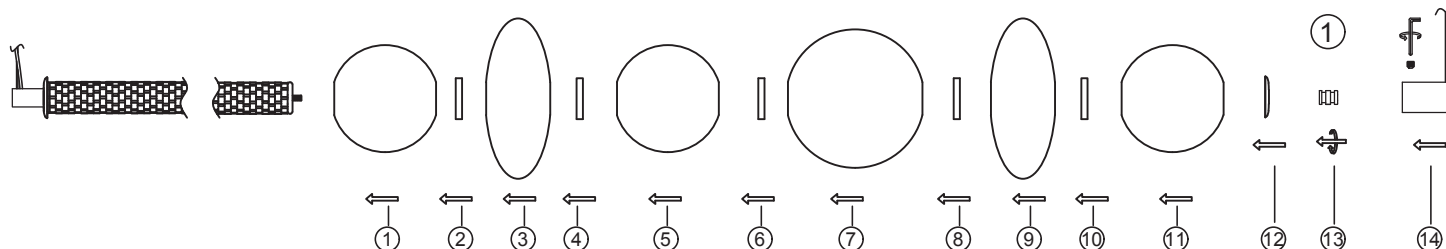


4. Insert the glass and screw it.



10. Turn on the general switch.




5. Drill holes and insert the screws into the base.




6. Drill and insert the screw through hanging element.



7. Connect wires.



8. Tie up side screws.

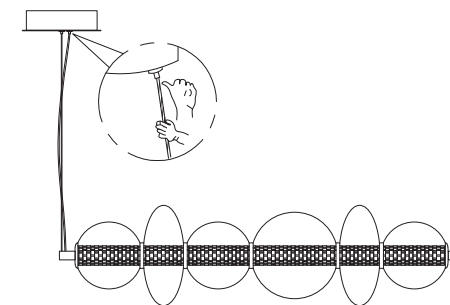

1. This light fitting operates at a normal supply voltage of 220-240V.

2. If the external flexible cable of the lamp is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid hazard.