

Artikelnummer:
70697

EAN-Nummer:
4000870706978



Name
Function Digital LED Strip Set 4,8m 12V RGB+W 18,8W 230/12V 24A Ws Kst

Hersteller
Paulmann

Artikelinfo

Interner Code	706.97
EAN	4000870706978
Farbe	Weiß
Material	Kunststoff
Garantie	5 Jahre
Hersteller	Paulmann
Lieferumfang	Montageanleitung Fernbedienung Batterien



Abmessungen

Gewicht netto	301 g
Länge	4,8 m
Verpackungsmaße BxHxL	19,7 x 21,8 x 8,4 cm
Abmessung (Höhe x Breite x Tiefe)	H: 3 x B: 4.880 x T: 10 mm



Technische Daten

Batterietyp	1xCR 2025/3V
Dimmbar	Ja
Spannung	230/12 V
Trafoleistung	24 VA
mit Steckverbinder	mit Steckverbinder

Leuchtmitteldaten

Bestückung	10,5 W
Anzahl Bestückung	1x
Anzahl Brennstellen	nv
Lebensdauer	30.000 h
Bemessungsleistung	18,8 W
Bestückung	incl. 1x10,5 W
Nennlichtstrom	1.710 lm
Bemessungs-/Nutzlichtstrom	2050 lm
Farbtemperatur Bereich	3.000 K
Leuchtmiteleigenschaft	LED fest integriert




Art.-Nr.: 706.96
706.97
709.09

PLIR 07/18



709.09: 1,5m
706.96: 3m
706.97: 4,8m



1x




1x

1x





1x




A

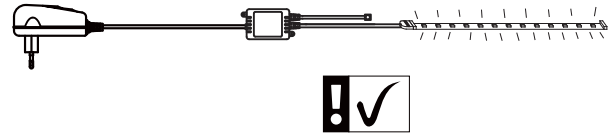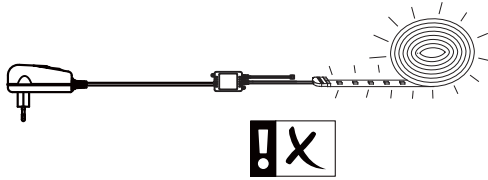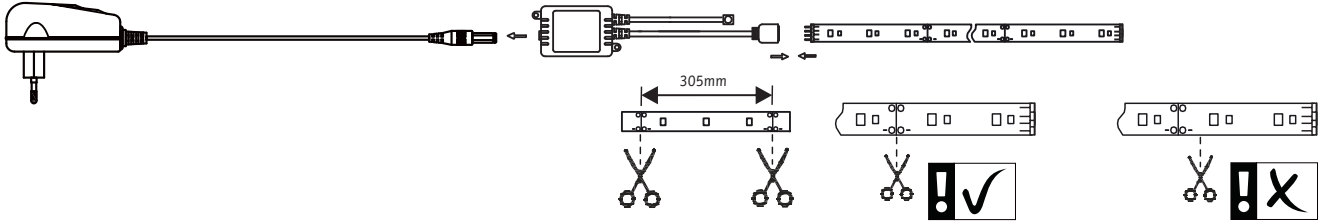




B



C

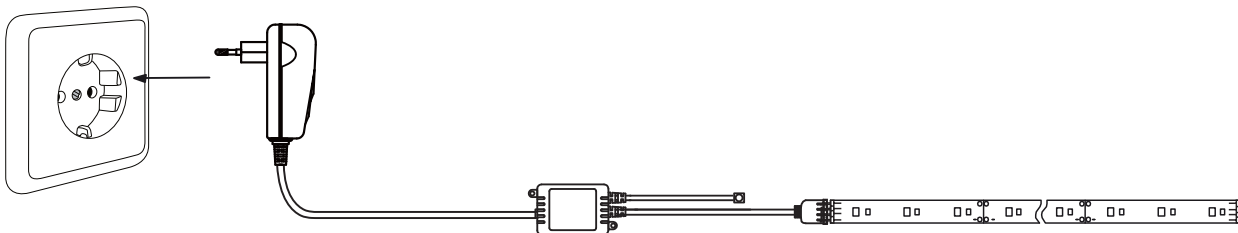

D

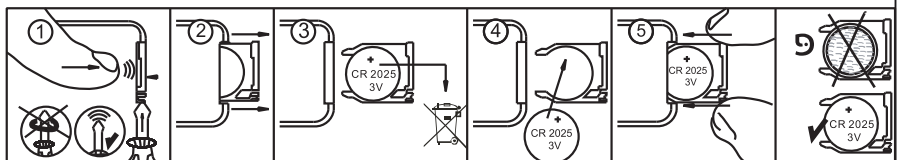



Paulmann



www.paulmann.com/manual-digled/all



Static Light effects:
dimming brightness up
Dynamic Light effects:
increases speed of light effect
IC number setting:
reactivates unlighted stripe segments



WWW shift key, 3000k



IC number setting / electronic cutting



flow to centre from two terminals
(CS, C3, C7, C16)



eight-color choice key in static model



Trail into right (CS, C3, C7, C16)



three-color choice key in static model



Horse race to right direction (CS, C3, C7, C16)



seven-color choice key in static model



spread to right (CS, C3, C7, C16)



sixteen-color choice key in static model



Queued color running to right with a tag
(CS, C3, C7, C16)



Static Light effects:
dimming brightness down
Dynamic Light effects:
slows down speed of light effect
IC number setting:
deactivates last stripe segments



ON/OFF key



flow to two terminals from centre
(CS, C3, C7, C16)



Auto-cycle mode



Trail into left (CS, C3, C7, C16)



Trail from two directions in turn



Horse race to left direction (CS, C3, C7, C16)



Flash function key (CS, C3, C7, C16)



spread to left (CS, C3, C7, C16)



Jump efficient key (CS, C3, C7, C16)






Queued color running to left with a tag
(CS, C3, C7, C16)




Queued color running with a tag from two
directions in turn



IC number setting / electronic cutting



Light effects



Choose color

3 color

7 color

16 color

"Flow"

"Trail"

"Horse Race"

"Spread"

"Queued"

